


**Kerb Specification:**  
 X2 kerb constructed from self finish white uPVC

**Typical Glazing Specification:**  
 2mm thick polyester powder coated aluminium with 16mm structured polycarbonate internal liner


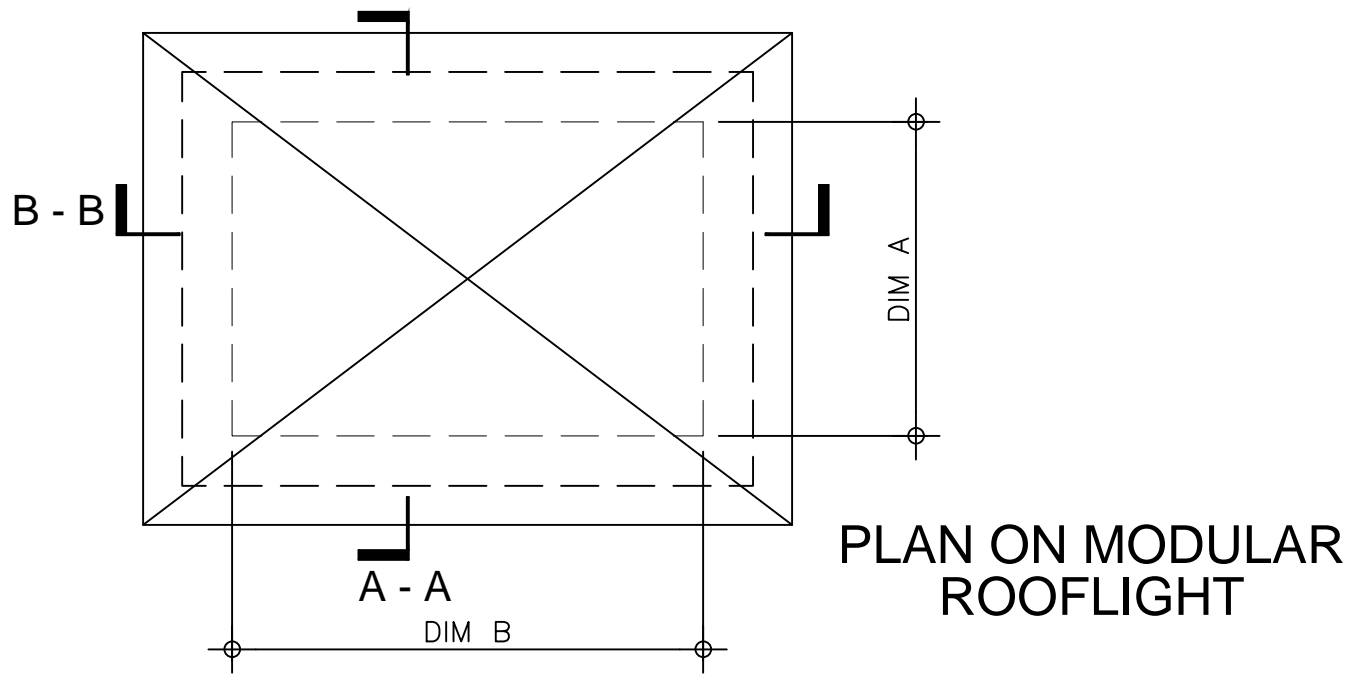



INSULATED ALUMINIUM LID  
 POP RIVETED TO X2 KERB

ROOF FINISHES DRESSED  
 UP EXTERNAL FACE OF  
 X2 KERB BY OTHERS

ROOF INSULATION  
 BY OTHERS

FIXING POINT (FIXINGS  
 DEPENDANT OF UPSTAND  
 SUBSTRATE, TO BE  
 DETERMINED BY CONTRACTOR)

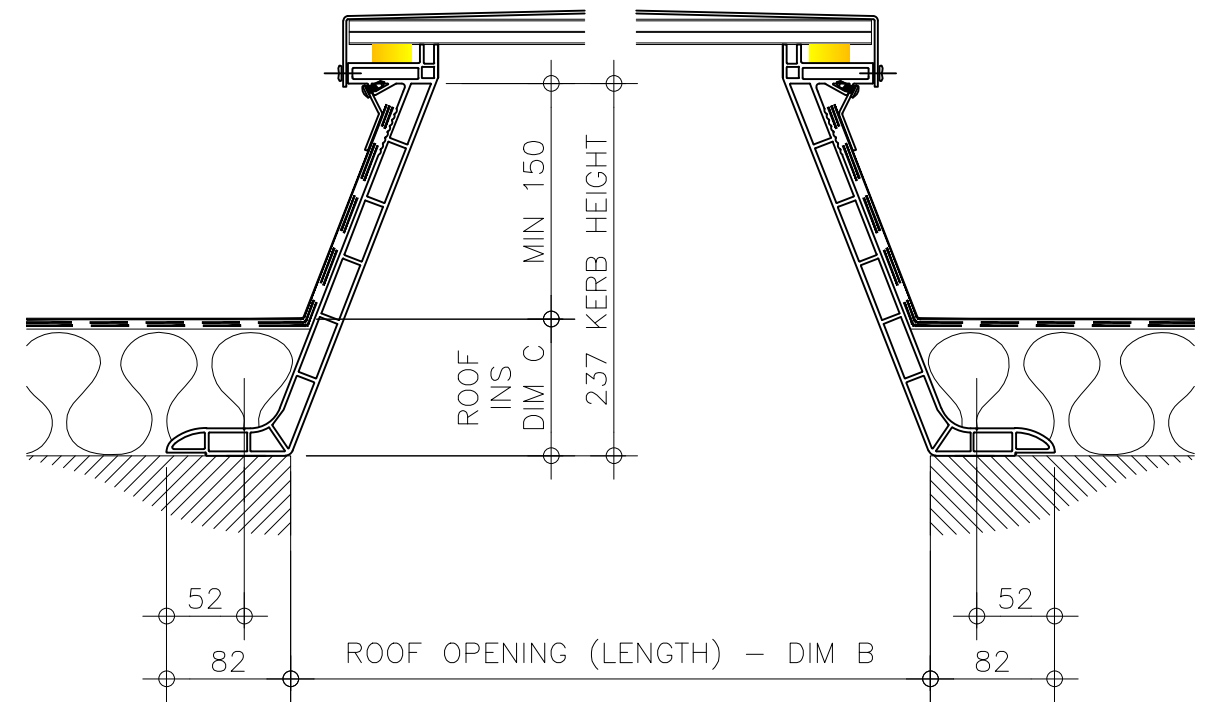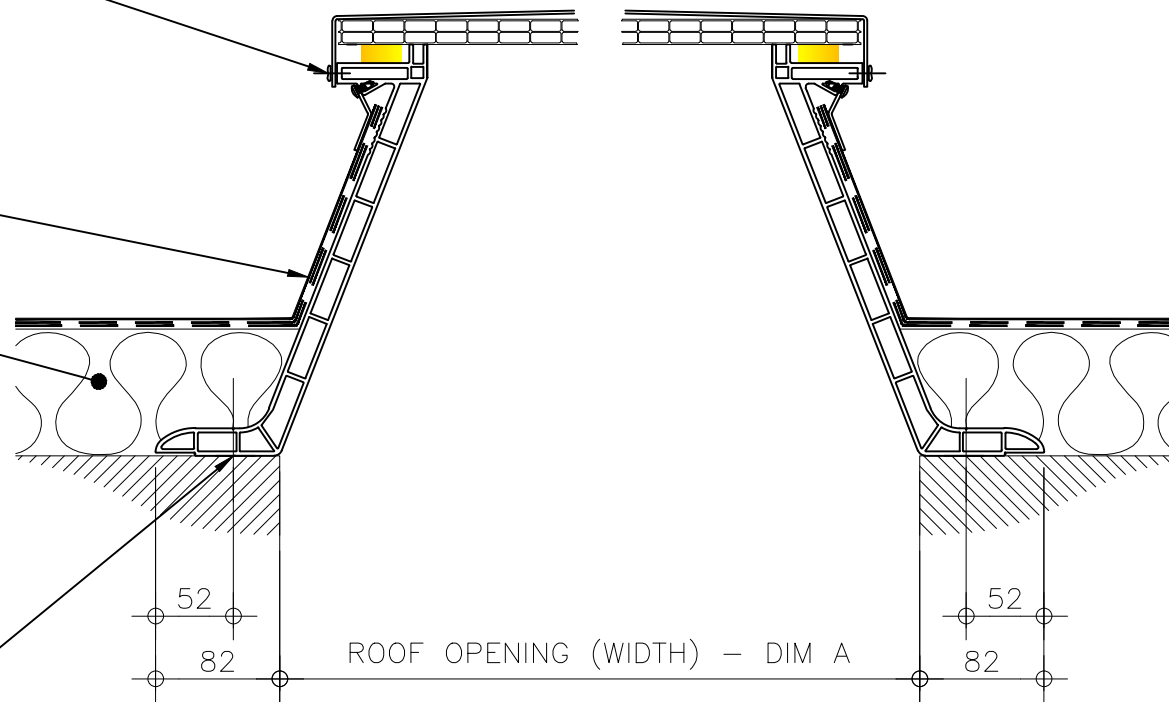

REV: 0	DATE: 19.12.13	DESCRIPTION: New modular drawings released	DRN BY IW	DESCRIPTION: Unventilated uPVC upstand fixed direct to roof with insulated solid lid (aluminium).					 DRG No. XT-X2-C-00-ISL
				DRAWN BY: IW	CREATION DATE: 19-Dec-13	CHECKED BY: ----	SCALE(S) 1:5 @ A3	REVISION: 0	
				<i>Xtralite (Rooflights) Limited</i> Spencer Road, Blyth Industrial Estate, Blyth, Northumberland, NE24 5TG T:01670 354 157 F:01670 364 875 E:sales@xtralite.co.uk W:www.xtralite.co.uk					