


Kerb Specification:
 X2 kerb constructed from self finish white uPVC

Typical Glazing Specification:
 Outer - 3mm thick clear UV protected polycarbonate
 Mid - 2mm thick clear polycarbonate
 Inner - 3mm thick clear polycarbonate

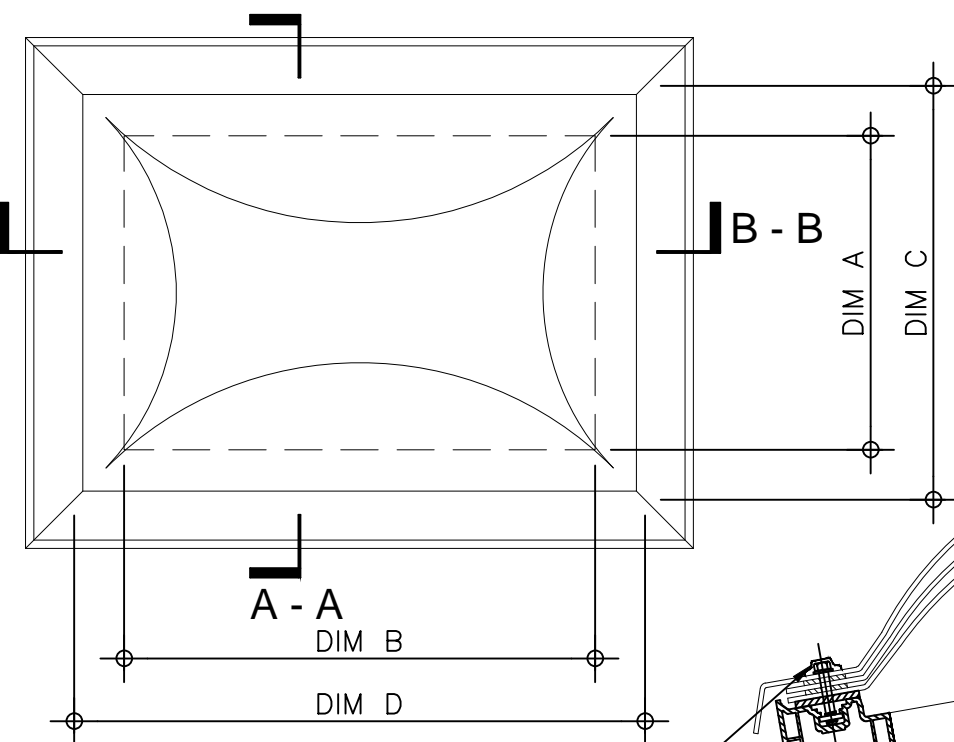

PLAN ON MODULAR ROOFLIGHT

STANDARD SECURITY SCREWS COMPLETE WITH COVER CAPS

FIXING POINT (FIXINGS DEPENDANT OF UPSTAND SUBSTRATE, TO BE DETERMINED BY CONTRACTOR)

ROOF FINISHES BY OTHERS

FILLET BY OTHERS

ROOF INSULATION BY OTHERS

LOCKING HANDLE

RESTRAINING CORDS

VARIABLE

GAS SPRING

237 KERB HEIGHT

150 MINIMUM

SECTION A - A


SECTION B - B

ROOF OPENING (WIDTH) - DIM A

ROOF OPENING (LENGTH) - DIM B

OVERALL BUILDERS KERB (WIDTH) - DIM C

OVERALL BUILDERS KERB (LENGTH) - DIM D

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:				
0	19.12.13	New modular drawings released	IW	uPVC access hatch upstand with adaptor base kerb, gas spring operated complete with restraining cords, triple skin polycarbonate lid and standard security screws.				
				DRAWN BY: IW	CREATION DATE: 19-Dec-13	CHECKED BY: ----	SCALE(S) 1:5 @ A3	
				Xtralite (Rooflights) Limited Spencer Road, Blyth Industrial Estate, Blyth, Northumberland, NE24 5TG T:01670 354 157 F:01670 364 875 E:sales@xtralite.co.uk W:www.xtralite.co.uk				DRG No. XT-X2-C-04G-SS