

PLAN ON AOV

ALWAYS HINGED ON LONG SIDE

FILLET BY OTHERS

ROOF FINISHES BY OTHERS

ROOF INSULATION BY OTHERS

FIXING POINT (FIXINGS DEPENDANT OF UPSTAND SUBSTRATE, TO BE DETERMINED BY CONTRACTOR)

13.5

CLEAR VENT SIZE

13.5

150 MIN

ROOF INS DIM C


ROOF OPENING (WIDTH) - DIM A

SILICONE SEAL

'C' SEAL TO UPSTAND

50

50

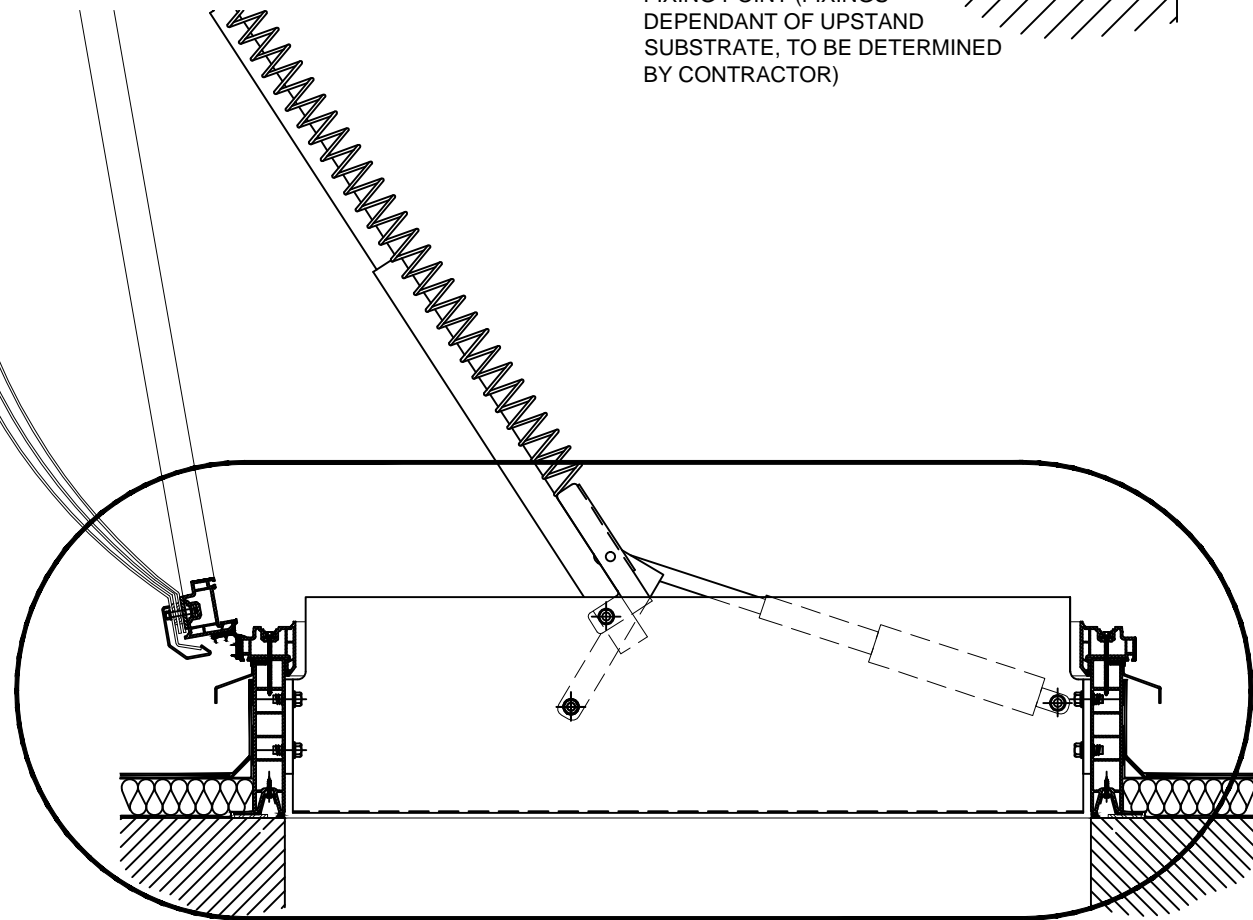

SECTION A - A

Kerb Specification:
X2V kerb constructed from self finish white uPVC

Typical Glazing Specification:
Outer - 3mm thick clear UV protected polycarbonate
Mid - 2mm thick clear polycarbonate
Inner - 3mm thick clear polycarbonate

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:	
0	16.12.13	New modular drawings released	IW	uPVC X2V kerb direct to roof with 140° electrically operated automatic opening vent, Triple skin polycarbonate dome and security frame. Vent actuated via 1No centrally located concealed rotary arm motor.	
DRAWN BY:		CREATION DATE:	CHECKED BY:	SCALE(S)	REVISION:
IW		16-Dec-13	DL	1:5 @ A3	0
<p>Xtralite (Rooflights) Limited Spencer Road, Blyth Industrial Estate, Blyth, Northumberland, NE24 5TG T:01670 354 157 F:01670 364 875 E:sales@xtralite.co.uk W:www.xtralite.co.uk</p>					



DRG No.
XT-X2V-C-05-140-R1-SF