


PLAN ON MODULAR ROOFLIGHT

Kerb Specification:
X2V kerb constructed from self finish white uPVC

Typical Glazing Specification:
2mm thick polyester powder coated aluminium with 16mm structured polycarbonate internal liner

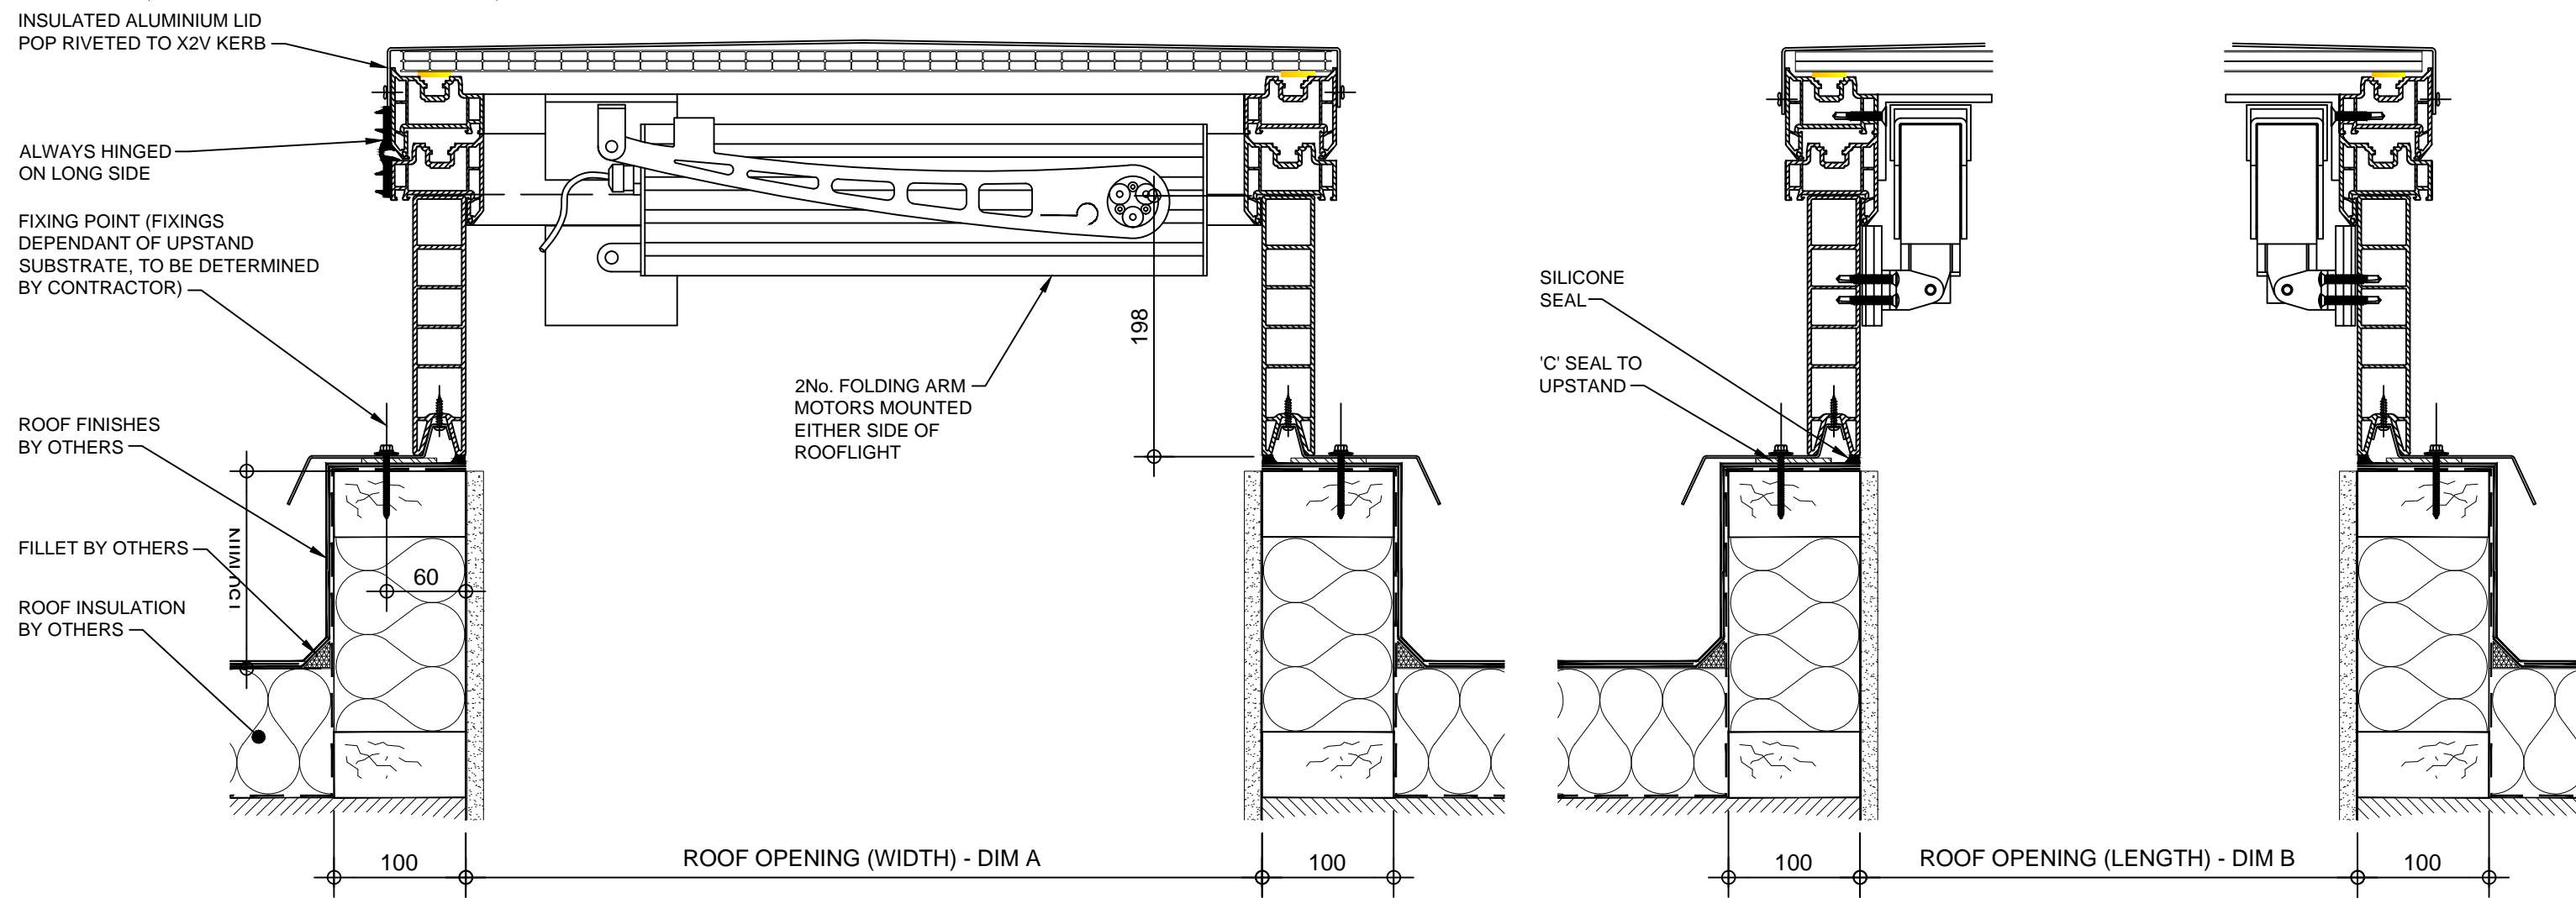

SECTION A - A

SECTION B - B

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:										
1	13.12.13	Upstand details revised	IW	200mm high uPVC X2V adaptor kerb upstand with 140° electrically operated automatic opening vent and insulated solid lid. Vent actuated via 2No folding arm motors.										
0	20.09.12	New modular drawings released	IW											
				<table border="1"> <tr> <td>DRAWN BY:</td> <td>CREATION DATE:</td> <td>CHECKED BY:</td> <td>SCALE(S)</td> <td>REVISION:</td> </tr> <tr> <td>IW</td> <td>13-Dec-13</td> <td></td> <td>1:5 @ A3</td> <td>1</td> </tr> </table>	DRAWN BY:	CREATION DATE:	CHECKED BY:	SCALE(S)	REVISION:	IW	13-Dec-13		1:5 @ A3	1
DRAWN BY:	CREATION DATE:	CHECKED BY:	SCALE(S)	REVISION:										
IW	13-Dec-13		1:5 @ A3	1										
				<p>Xtralite (Rooflights) Limited Spencer Road, Blyth Industrial Estate, Blyth, Northumberland, NE24 5TG T:01670 354 157 F:01670 364 875 E:sales@xtralite.co.uk W:www.xtralite.co.uk</p>										

Xtralite
ROOFLIGHTS

DRG No.
XT-X2V-D-05-140-FA2-ISL