



Kerb Specification:
X2V kerb constructed from self finish white uPVC

Typical Glazing Specification:
2mm thick polyester powder coated aluminium with 16mm structured polycarbonate internal liner

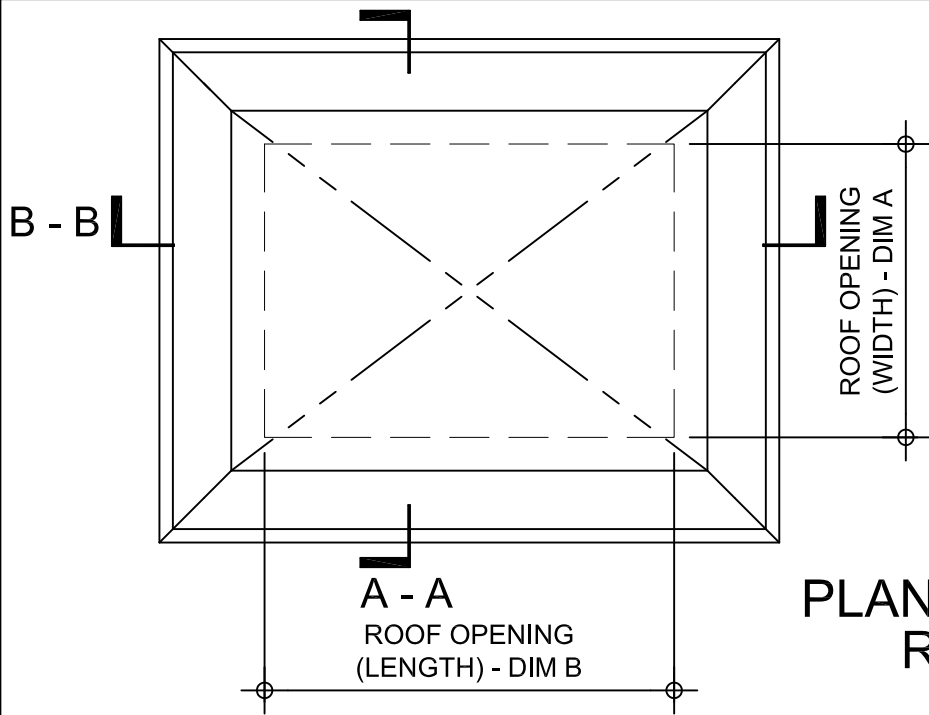


PLAN ON MODULAR ROOFLIGHT

- INSULATED ALUMINIUM LID POP RIVETED TO X2V KERB
- ALWAYS HINGED ON LONG SIDE
- FILLET BY OTHERS
- ROOF FINISHES BY OTHERS
- ROOF INSULATION BY OTHERS
- FIXING POINT (FIXINGS DEPENDANT OF UPSTAND SUBSTRATE, TO BE DETERMINED BY CONTRACTOR)

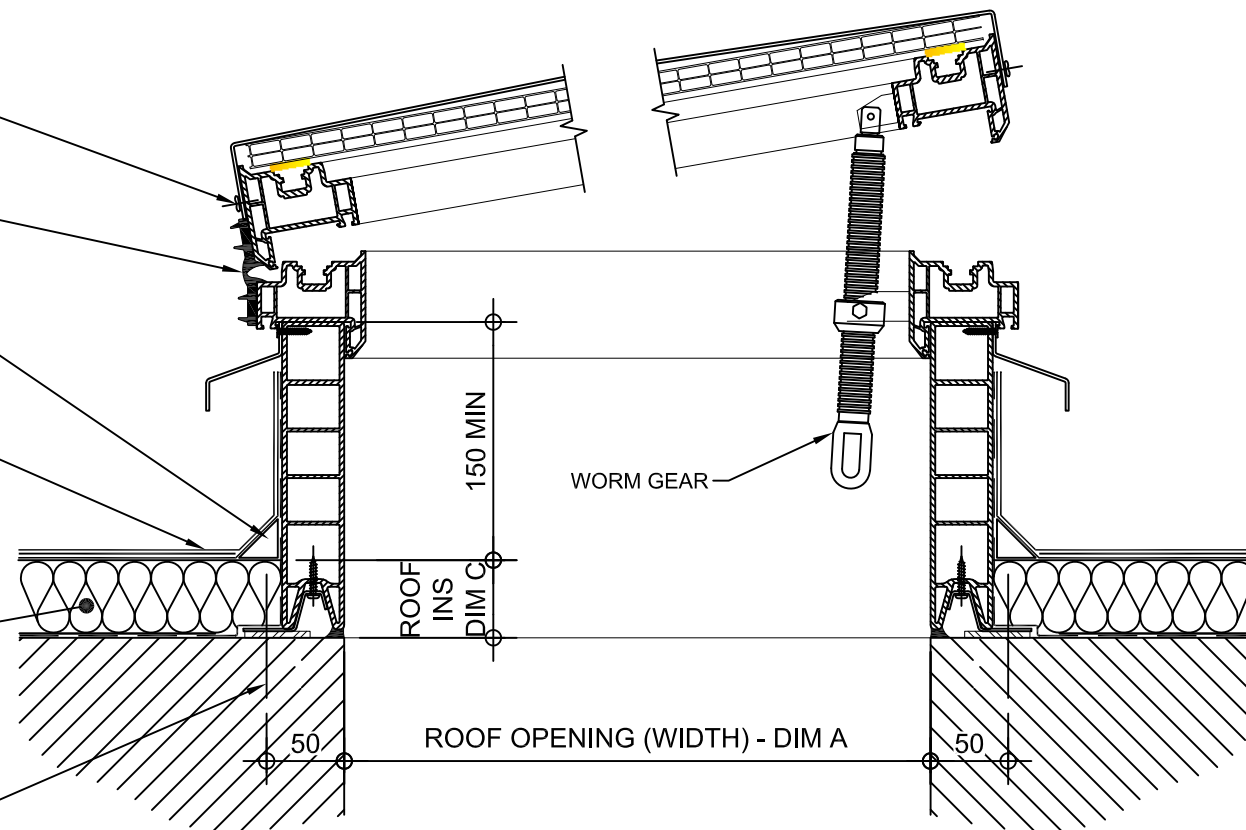

SECTION A - A

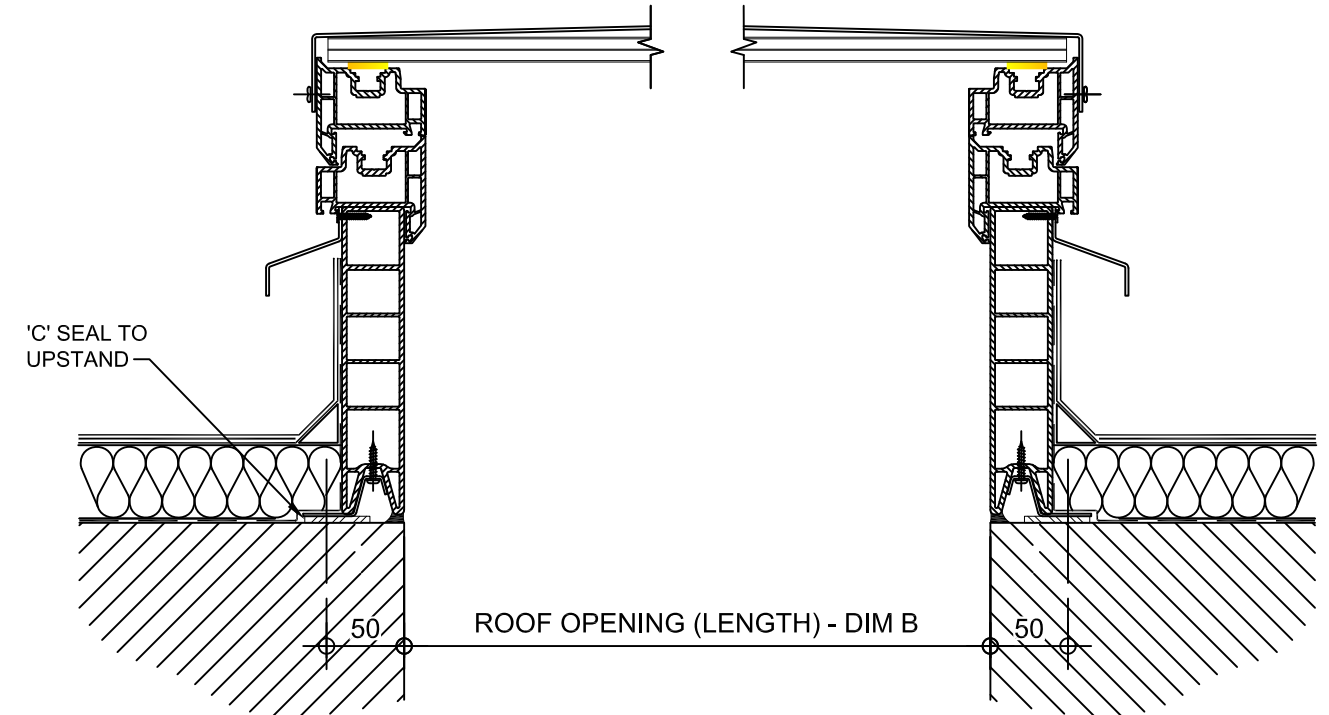

SECTION B - B

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:				
1	29.11.13	Updated to show single stack	IW	uPVC X2V kerb direct to roof with wormgear opening vent and insulated solid lid.				
0	06.12.12	New modular drawings released	IW					
		DRAWN BY:	CREATION DATE:	CHECKED BY:	SCALE(S)	REVISION:		
		IW	29-Nov-13	DL	1:5 @ A3	1		
Xtralite (Rooflights) Limited Spencer Road, Blyth Industrial Estate, Blyth, Northumberland, NE24 5TG T:01670 354 157 F:01670 364 875 E:sales@xtrallite.co.uk W:www.xtrallite.co.uk					DRG No. XT-X2V-C-03-ISL			